

Installing and
Maintaining
**Automatic
Doors** for
over 20
years!



- Home
- Products**
- About Us
- Service & Maintenance
- Installation & Contracts
- Contact Us

You are here: [Products](#) > [Accessories](#) > WEL Accessories

WEL Accessories

[Download this Spec sheet](#) 

WELBS

Slide arm for the Wel Range

- Inward opening Arm
- L = 900mm



WELBA

Articulated arm for the Wel Range

Outward opening Arm



WELBSS

Slide arm with break-out for the Wel Range. Will enable the door to be pushed both ways in case of emergency.

L = 900mm



WELBRAS

BRAS arm for the Wel Range

Will allow a recessed door to be Automated as a in-ward opening door.
(Maximum recess 185mm)



WELD40

Neck extension For the Wel Range.

Will drop the arm 25mm.



V2306 / V2307

Continuous Back plate and cover for the Wel Range, available up-to 5700mm.

Ideal for use when two operators are fitted as a pair.



WELBAT

In-line battery back-up for the WEL range, Complete with Back plate and cover, cut to 240mm.



WELTP

Optional End cap for Wel Range,
Incorporating 3 Position Switch and a 2
Position Switch.



WELTI

Intermediate head kit for box extension.
Sold as a pair



ALU MP

Mounting Plate, available in either
4", 5" or 6" wide in a RAW finish.

Sold in 1m lengths.

Codes :

ALU MP4 = 4" Mounting plate.

ALU MP5 = 5" Mounting Plate.

ALU MP6 = 6" Mounting Plate.




ALU SPC

Spacer bar for all types of slide arm.

Dimensions: W = 1.5", H = 1" L = 1m.

RAW finish.

Ideal if door is slightly recessed.

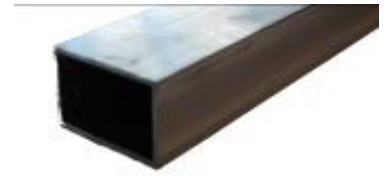

[Website Design](#) and [Marketing](#) by Toxic Creative Ltd www.ToxicCreative.co.uk

© Wellingborough Door Company Ltd 2008